

LINCAT SILVERLINK ELECTRIC FREE-STANDING TWIN TANK FRYER - 2 BASKETS - W 600 MM - 2 X 6.0 KW

MODEL: J12



SILVERLINK 600

Deliver perfectly crisp on the outside and fluffy on the inside chips time after time with the Silverlink 600 Free Standing Electric Fryer. Two independently operated fryer tanks means you have greater versatility while cooking, with a power that delivers 52kg of chips an hour. Ideal for cafes, pubs and restaurants, the fryer is built from sturdy stainless steel, while the heavy duty nickel plated baskets are designed for the most demanding of operations. You're in control via the accurate thermostat throughout the entire cooking process, and hinged elements give easy access during cleaning. Then there's the innovative deep cool zone, which collects cooking debris to prolong the life of the oil and therefore save you money.

PRODUCT OPTIONS AND ACCESSORIES

BA96 BASKET SPUN DESMALL

PRODUCT FEATURES

- Two independently operated fryer tanks for greater versatility, delivers 52kg of chips per hour
- Front mounted controls for safety
- · Hinged elements to give easy access during cleaning
- Cool zone collects cooking debris gives cleaner cooking results and saves money by prolonging the life of the oil
- Thermostatically controlled to give accurate cooking temperatures throughout cooking
- Fully moulded 304 stainless steel tank and heavy duty nickel plated baskets for the most demanding of operations
- Front drain off tap for easy removal of cooking oil







LINCAT SILVERLINK ELECTRIC FREE-STANDING TWIN TANK FRYER - 2 BASKETS - W 600 MM - 2 X 6.0 KW

MODEL: J12

WEIGHTS & DIMENSIONS	
Width	600 mil
Depth	632 mil
Height	980 mil
Weight	44 kg

SHIPPING DETAILS	
Ship Width	78 cm
Ship Depth	78 cm
Ship Height	110 cm
Ship Weight	48.4 kg
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



FNIEDCV CDECC

ENERGY SPECS	
Primary Energy Type	Electric
Electrical Amps Per Conductor	Single Phase 2 x 26.0/ Three Phase L1=2 x 13.0; L2=2 x 13.0; L3=N/
Electrical Total Amperage	52 A
Electrical Volts	230-400V
Electrical Total Wattage	12000 W

Electrical Kilowatts	12 kW
Electrical Plug Type	Hardwired
Number of Electrical Plugs	2
Electrical Connection Type	Direct Hardwired
Number of Electrical Conductor Wires	2
Electrical Remarks	Single,Three

ADDITIONAL SPECIFICATIONS	
Auto Oil Top-Off	No
Basket Lift Type	Not Applicable
Construction Materials	Stainless Steel
Control Type	Rotary Control Knob
Food Production Rate	36kg chips -12mm [frozen], 52kg chips - 12mm [chilled] per hour
Fryer Type	Open Pot
Integrated Filtration	No
Number of Baskets	2

Number of Vats (batteries)	2
Total Oil Capacity (volume)	18
Oil Reclamation	No
Oil Temperature Control	Mechanical
Pumped Oil Filtration	No
Vat 1 Oil Capacity (volume)	91
Vat 2 Oil Capacity (volume)	91
Ventless Cooking Technology	No
Split Pot	Yes
Temperature Maximum	190 °C

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025









MODEL: J12


BIDDING SPECIFICATIONS

Bidding Specifications Not Available.

TECHNICAL DRAWING





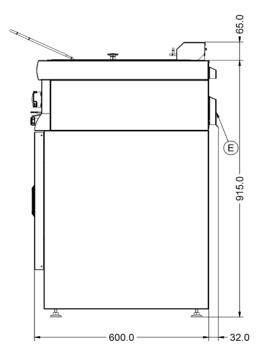

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025

