

## LINCAT SILVERLINK 600 PROPANE GAS FREE-STANDING OVEN RANGE - LEGS AT REAR - 4 BURNERS - W 600 MM - 23.8 KW

### MODEL: SLR6C/P



Cook a variety of delicious dishes with the powerful Silverlink 600 Gas Oven Range. The four gas burners not only offer power, but also come with a flame failure device for added safety. The oven range, perfect for cafe bars, care homes and small restaurants, has a high power gas oven, and also comes with a low level flue which maximises the working area and enables you to use large stock pots. The fully pressed and sealed hob tops make for easy cleaning, and there are four shelf positions with two removable shelves.

**SILVERLINK 600** 

#### PRODUCT OPTIONS AND ACCESSORIES

SLR6/SB - Splashback

#### **PRODUCT FEATURES**

- Four powerful gas burners with flame failure device for added safety
- High power gas oven
- Fully pressed and sealed hob tops for easy cleaning
- Robust, easy-to-clean vitreous enamelled cast iron pan supports
- Low level flue maximises working area and enables you to use large stock pots
- · Four shelf positions with two removable shelves







# LINCAT SILVERLINK 600 PROPANE GAS FREE-STANDING OVEN RANGE - LEGS AT REAR - 4 BURNERS - W 600 MM - 23.8 KW

## **MODEL: SLR6C/P**

WEIGHTS & DIMENSIONS	
Width	485 mm
Depth	600 mm
Height	956 mm
Weight	67.9 kg

SHIPPING DETAILS	
Ship Width	81.3 cm
Ship Depth	68.5 cm
Ship Height	110 cm
Ship Weight	74.69 lb
Number of Shipment Parcels	1
Ship Method	Small Parcel (FedEx, UPS, DHL)
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

#### **PRODUCT CERTIFICATIONS**



ENERGY SPECS		
Primary Energy Type	Gas	Gas Total BTUs
Electrical Kilowatts	23.8 kW	Gas Inlet Size
Electrical Plug Type	Not Applicable	Gas Inlet Pressure Required
Number of Electrical Plugs	Not Applicable	Gas Consumption at Max Use Per Hour
Electrical Connection Type	Not Applicable	Total Heat Input at Max Use
Gas Type	Propane	Total fical input at Max Ose

ADDITIONAL SPECIFICATIONS			
Construction Materials	Stainless Steel	Open or Sealed Burners	Sealed
Control Type	Mechanical, Rotary	Oven Power Rating	5.8 kW
	Control Knob	Oven Temperature Minimum	130 °C
Exterior Trim Finish Color	Stainless Steel	Oven Temperature Maximum	250 °C
High Altitude Kit Available	No	Shelf Depth	342 mm
Number of Heating Zones	4	Shelf Width	480 mm
Number of Hot Top Burners	4	Ventless Cooking Technology	No
Number of Shelf Positions	4	Cooking Equipment	Sealed Burner
Number of Shelves	2	BTUs Per Burner	4.5 KW

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025

81206 BTU 0.5 in 37 mBar

 $1.7 \, \text{m}^3$ 

per hour

23.8 kW, 81,209 BTU





# LINCAT SILVERLINK 600 PROPANE GAS FREE-STANDING OVEN RANGE - LEGS AT REAR - 4 BURNERS - W 600 MM - 23.8 KW

## **MODEL: SLR6C/P**

SELECT COOKING EQUIPMENT	NUMBER OF		POWER RATING	ARRANGE- MENT	WIDTH	DEPTH
Sealed Burner 1		4	5.	8 Center	300 mm	300 mm
SELECT BASE EQUIPMENT	NUMBER OF		<b>CUBIC CAPACITY EACH</b>	WIDTH	DEPTH	HEIGHT
Standard Oven 1		1		485 mm	342 mm	400 mm

#### **BIDDING SPECIFICATIONS**

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025










## **MODEL: SLR6C/P**

#### **TECHNICAL DRAWING**



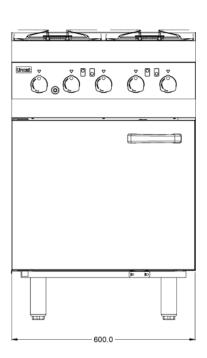

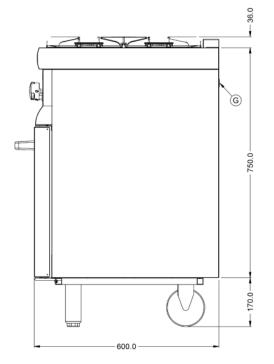

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 09, 2025

