

Model:  
 NT1ST-LE

High-Efficiency Single Door Bottle Cooler Energy Class C  
 0.95 kWh/24h | 107 Bottle Capacity | 30°C Ambient Rated<sup>2</sup>



C

#### ENERGY RATING INFORMATION



Prodis NT1ST-LE



347 kWh/annum



126 L



5°C



≤ 25°C

2024/2026

C

#### GENERAL INFORMATION

The Prodis NT1ST-LE combines market-leading efficiency with a premium stainless steel exterior, making it the ideal choice for venues where professional aesthetics and low running costs are paramount. Officially rated as an Energy Class C appliance, it consumes just 0.95 kWh per 24 hours – costing approximately 29p per day to run.

Distinguished by its contemporary stainless steel finish, this model offers superior durability and easier cleaning compared to standard painted units. It features a heavy-duty R600a cooling system warranted for operation in ambient temperatures up to 30°C, ensuring cold beer even in hot commercial environments. With a real-world capacity of 107 bottles, whisper-quiet operation (43dB), and premium LED lighting, it turns a compact 600mm footprint into a stylish, high-profit retail display.

#### KEY FEATURES



#### KEY FEATURES

- Market-Leading Efficiency:** Official Energy Class C rating with a daily consumption of just 0.95 kWh/24h, reducing running costs to as little as 29p per day.
- Heavy-Duty Cooling:** Tested at Climate Class 3 (25°C) for maximum efficiency, but engineered and warrantied for operation in high-ambient environments up to 30°C.
- Optimised Capacity:** Efficient internal design holds 107 x 275ml bottles\* (or 94 x 330ml standard lager bottles) across 2 adjustable shelves and the base.
- Whisper-Quiet Operation:** Running at just 43dB, this unit is perfect for quiet hotel lobbies, meeting spaces, and office boardrooms.
- Premium Merchandising:** Full-width, pure white LED illumination creates a bright, shadow-free display to drive product sales.

#### TECHNICAL & OPERATIONAL FEATURES

- Precision Control:** Externally mounted digital temperature controller (range +2°C to +10°C with automatic off-cycle defrost).
- Optimised Airflow:** Front-breathing ventilation system allows for tight installation with minimal clearance required (25mm rear / 10mm sides).
- Temperature Class K4:** Certified to maintain an average product temperature of +5°C, ideal for premium lagers, craft ales, and white wines.
- Security Standard:** Doors feature factory-fitted locks as standard for stock security.
- Construction:** Premium stainless steel exterior with a hygienic, easy-clean aluminium interior.

#### INSTALLATION & MAINTENANCE

- Space-Saving Design:** Slimline 520mm depth ensures a perfect fit behind standard bar counters without protruding into the workspace.
- Replaceable Gaskets:** Door seals are easy to remove and replace, ensuring a tight seal and maintained efficiency over the unit's life.
- Self-Closing Mechanism:** Doors are engineered to close automatically to prevent accidental energy loss, featuring a positive seal system to maintain the Class C efficiency rating.
- Eco-Friendly:** Charged with R600a refrigerant (GWP 3), fully compliant with modern environmental standards.
- Plug & Play:** Supplied with a 1.85m lead and moulded UK 13A plug for immediate installation.

## DIMENSION &amp; WEIGHT

External dimensions (W x D x H mm)	600 x 520 x 900
Internal dimensions (W x D x H mm)	510 x 355 x 745
Depth door open (mm)	1035
Width doors open (mm)	765
Shelf dimension W x D (mm)	485 x 318
Packaged dimensions W x D x H (mm)	655 x 560 x 1035
Net weight (kg)	40
Gross weight (kg)	45.5

## SHELF SPECIFICATION

Shelf size (W x D mm)	485 x 318
Shelf capacity (kg)	20
Number of shelves	2
Base size (W x D mm)	510 x 205

## BOTTLE CAPACITY

## 330ml (Ø 61mm) standard bottle

Shelf capacity	35 (7 x 5 lane packing)
Base capacity	41 (hexagonal packing)

Total bottle capacity	94 (real world usage figures)
	106 (maximum theoretical loading)

## 330ml (Ø 58mm) sleek bottle

Shelf capacity	40 (8 x 5 lane packing)
Base capacity	45 (hexagonal packing)


Total bottle capacity	24 (8 x 3 lane packing)
	94 (real world usage figures)

## 275ml (Ø 55mm) stubby bottle


Shelf capacity	45 (hexagonal packing)
Base capacity	27 (8 x 3 lane packing)
Total bottle capacity	27 (hexagonal packing)
	104 (real world usage figures)
	117 (maximum theoretical loading)

## 900mm

600mm

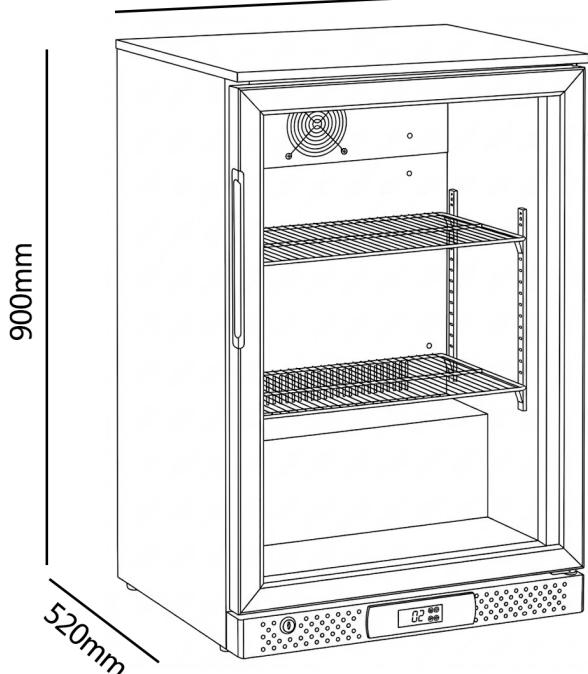


## LANE PACKING EXAMPLE



## STANDARD LANE PACKING (GRID LAYOUT)

The Standard Lane Packing method prioritizes accessibility and cooling efficiency over maximum density. In this configuration, bottles are aligned in straight columns and rows, creating a reliable grid where the theoretical capacity is easily achieved in the real world. Crucially, the void spaces naturally formed between the non-nested bottles significantly increase airflow throughout the cabinet. This enhanced circulation ensures rapid temperature drawdown and uniform cooling, which maximizes the energy efficiency of the refrigeration system. This layout is the ideal choice for operations where quick restocking, lower energy consumption, and product visibility are the primary requirements.

## HEXAGONAL PACKING EXAMPLE



## HEXAGONAL PACKING (HONEYCOMB LAYOUT)

The Hexagonal Packing method utilizes geometric efficiency to maximize storage density by nesting each new row of bottles into the triangular gaps of the previous one. This "staggered" arrangement delivers a substantial increase in stock holding capacity compared to a standard grid. However, there is often a distinction between the mathematical maximum and the "Efficient Real-World" capacity, as the tightest theoretical fit can make loading difficult. Furthermore, this increased density reduces the gaps between bottles, restricting airflow through the shelf. While this method allows for maximum volume, the limited air circulation means the refrigeration unit may work harder to cool the product, resulting in increased energy usage.

<sup>1</sup> Testing Standard: Official Energy Efficiency Class 'C' and daily consumption figures (0.95 kWh/24h) are verified under EN16902 standards at Climate Class 3 (25°C / 60% RH).

<sup>2</sup> Operational Limit: This unit is engineered with a heavy-duty cooling system warrantied for continuous operation in ambient temperatures up to 30°C (Climate Class 4). Note that energy consumption will naturally exceed published test figures when operating in ambients above 25°C.

