

# Ventilated Gastronorm Refrigeration


2/1 Gastronorm Capacity

**KXR600**

**KXF1200**



KXR models - suitable for fresh meat storage

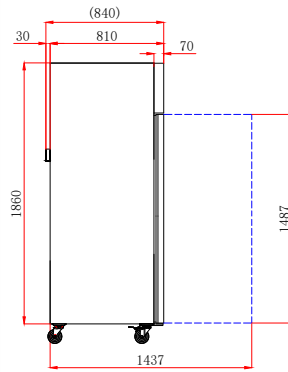

## FEATURES

- 201 stainless steel exterior & interior
- Internal corners rounded to aid cleaning
- 3 adjustable shelves GN2/1 per door
- 60 mm thick insulation
- Lock fitted as standard
- Heavy duty castors as standard
- Single door models have reversible door
- LED lighting
- Self closing door(s) with dwell position
- Suitable for fresh meat storage (KXR range)
- Replaceable door gasket

## TECHNICAL SPECIFICATIONS

	KXR models	KXF models
Cooling:	Ventilated	
Controller:	Dixell controller	
Defrost:	Automatic	
Refrigerant:	R290	R290
Climate Class:	4	
Temperature Range:	-2°C ~ +8°C	-18°C ~ -22°C
Power Supply:	13amp	

MODEL	DOOR	GROSS CAPACITY	EXT. DIMENSIONS (H x W x D mm)	ENERGY RATING	POWER CONSUMPTION	KWH /ANNUM	DECIBELS	WEIGHT (kg)	RRP
KXR600	1	600L	2000 x 680 x 840	D	195W	815	60dBA	125	
KXF600	1	600L	2000 x 680 x 840	E	450W	2826	60dBA	132	
KXR1200	2	1200L	2000 x 1340 x 840	D	380W	1382	60dBA	213	
KXF1200	2	1200L	2000 x 1340 x 840	E	700W	4317	60dBA	221	

