


Technical Details	C 25	C 35	C 45	C 45P	C60	C60P	C80	C135
Dimensions (w,d,h mm)	350 x	435 x	435 x	435 x	515 x	515 x	645 x	930 x
	475 x	605 x	605 x	605 x	645 x	645 x	645 x	565 x
	590mm	695mm*	695mm*	695mm*	840mm*	840mm*	870mm**	915mm**
Production (kg/24hr)***	22kg	32kg	43kg	43kg	62kg	62kg	82kg	134kg
Storage Bin	6kg	15kg	15kg	15kg	30kg	30kg	40kg	60kg
Ice Cube Size	S - 14g	M - 22g	M - 22g	M - 22g	M - 22g	M - 22g	M - 22g	M - 22g
Refrigerant	R290	R290	R290	R290	R290	R290	R290	R290
Refrigerant Charge	70g	75g	65g	65g	95g	95g	135g	150g
Climate Class	T (Tropical)	T (Tropical)	T (Tropical)	T (Tropical)	T (Tropical)	T (Tropical)	T (Tropical)	T (Tropical)
Condensation System	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled	Air Cooled
Inlet Connection	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP
Drain Type	Gravity	Gravity	Gravity	Pumped	Gravity	Pumped	Gravity	Gravity
Drain Connection	20mm	20mm	20mm	20mm	20mm	20mm	20mm	20mm
Drain Exit Height	101mm	101mm	101mm	101mm	101mm	101mm	101mm	101mm
Electrical Con- nection	13amp	13amp	13amp	13amp	13amp	13amp	13amp	13amp
Electrical Rating	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz	230V N+T 50hz
Power Rating	260w	356w	510w	510w	540w	540w	720w	1150w

Operating Ranges								
Air Temp.	10°c - 40°c	10°c - 40°c	10°c - 40°c	10°c - 40°c	10°c - 40°c	10°c - 40°c	10°c - 40°c	10°c - 40°c
Water Temp.	5°c - 35°c	5°c - 35°c	5°c - 35°c	5°c - 35°c	5°c - 35°c	5°c - 35°c	5°c - 35°c	5°c - 35°c
Water Pressure	0.7 - 6 bar	0.7 - 6 bar	0.7 - 6 bar		0.7 - 6 bar		0.7 - 6 bar	0.7 - 6 bar
Options								
Water Filter	Optional	Optional	Optional	Optional	Optional	Optional	Optional	Optional

* Legs +12-20mm
** Legs +105-155mm
***Production values calculated at 21°c ambient air temperature, 15°c water temperature



Project Distribution Ltd
Unit 1 Sun Street
Stoke on Trent
United Kingdom
ST1 4JW
01782 280289
sales@project-distribution.co.uk
www.prodis.co.uk

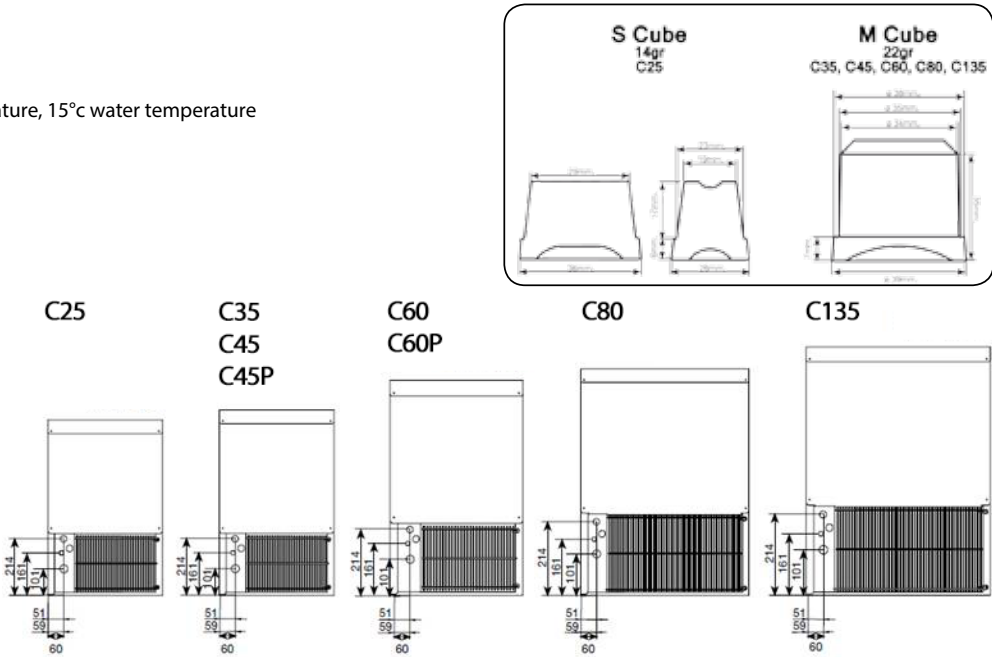

C Series

Ice Makers

- C 25
- C 35
- C 45
- C 45P
- C 60
- C 60P
- C 80
- C 135






C Series

- A range of under counter icemakers specifically designed for the hospitality market. Perfectly suited to bars, pubs, restaurants and cafes.
- Crystal clear super hard ice cools drinks quickly but melts slowly allowing drinks to stay colder for longer.
- All machines are rated to climate class T (Tropical) allowing them to operate in ambient temperatures up to 40°C making them suitable for installation in the most demanding environments.
- The C series are fitted with patented flexible spray nozzles to minimise limescale build up and reduce maintenance intervals.
- All machines are injected with high density polyurethane insulation to preserve the consistency and quality of ice for longer.
- All components in contact with water have been designed to minimise friction and surface tension to reduce sound levels during production.



- Specifically designed for the hospitality industry
- Crystal clear super hard slow melting ice cubes
- European manufactured to ISO9001 standards
- Proven and reliable ice production system
- Front venting
- High drain exit height for easy installation
- Patented flexible spray jets to minimise limescale build-up
- Front mounted mains on off switch
- Injected HCFC free polyurethane for outstanding insulation

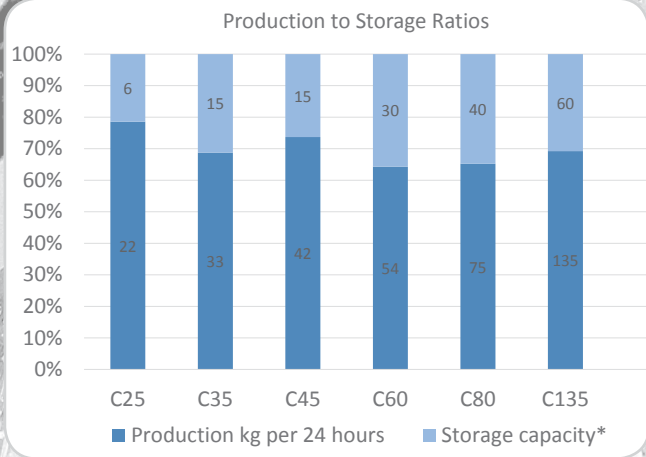

C25
22kg Production
6kg Storage



C35
32kg Production
15kg Storage



C45/C45P
43kg Production
15kg Storage



C60/C60P
62kg Production
30kg Storage



C80
82kg Production
40kg Storage



C135
134kg Production
60kg Storage



Economy Without Compromise



*Production values calculated at 21°C ambient air temperature, 15°C water temperature